

|iPer|
com



Door Entry < Entry Panels

mikra

1 Button Video Entry Panel

ref. 1060/21

- IP PoE Mikra2 1 button video entry panel for IPerCom systems
- Arrives with built-in Mifare Classic reader

urmet

Key Features


- Vandal resistant
- Wide angle colour camera (113 degrees) with LED illumination
- LED illuminated button and nameplate
- Call button reassurance
- DDA LED illuminated display icons for 'Call in Progress', 'Please Speak' and 'Door Open'
- Built-in Mifare Classic Reader

Specifications

Material	Zamak
Dimensions	H180mm x W100mm x D28mm
Ingress Protection (IP) Rating	IP55
Impact Protection (IK) Rating	IK07
Camera Angle	113°

Components Description

1. Speaker
2. Camera lighting LED
3. Camera
4. Transponder reader
5. Name Tag(s)
6. Signalling LEDs dedicated to the DDA Function
7. Calling button
8. Microphone
9. Front Closing Screw

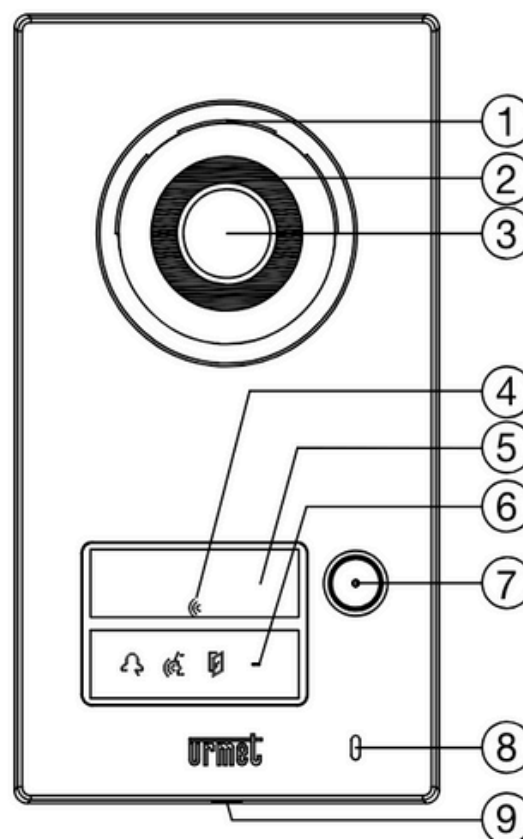

Technical specifications

- Power voltage POE: 44 ÷ 57 V
- Local power voltage: 48 V
- Maximum consumption during video calls: 3,5 W
- Maximum stand-by consumption: 2 W
- LAN maximum operating distance (with POE or without POE): 100 m with CAT5 cable
- Max. distance from supplementary power supply: 25 m with wire cross section of minimum 0,5 mm²
- Supported user key type: Mifare (1125/54)
- Name tag dimensions: 48.5 x 15.5 mm
- Tag and button light: White LEDs
- Dimensions (WxHxD): 100 x 180 x 28 mm
- Degree of protection of casings: IP55
- Degree of protection from mechanical shocks: IK07
- Working temperature range: -10 °C ÷ +55 °C