



## Door Entry < Monitors

# miro

## Video Handset

ref. 1750/1

- Illuminated Lock release button
- 3 additional programmable buttons
- LED indication for 'Mute' and 'Door Open'
- Built-in induction loop
- Changeable ring tones
- Door bell input
- up to 3 intercoms calls
- Up to 4 handsets can be connected to 1 entry panel call button

**urmet**




## Overview

The Miro Video Handset monitor for 2Voice system. It uses a 2Wire connection, and is programmed using DIP switches. It is equipped with the ability to forward a call from the Entry Panel to your smartphone via the Urmet CallMe App. Desk mount kit is also available 1750/92.

## Specifications

Finish	Glossy
Material	White ABS Plastic
Dimensions (with handset)	H200mm x W175mm x D52mm
Dimensions (without handset)	H200mm x W175mm x D27mm
Screen Size	4.3 Inches
Aspect Ratio	16:9

## Device Features

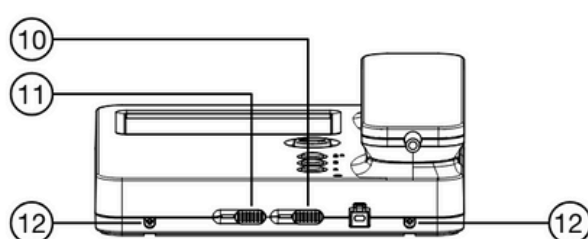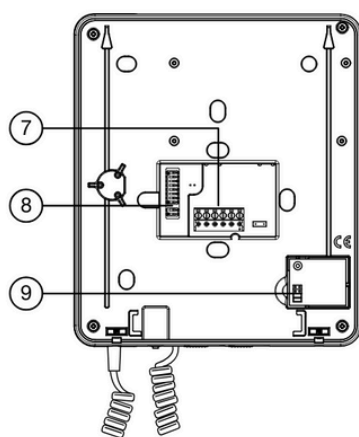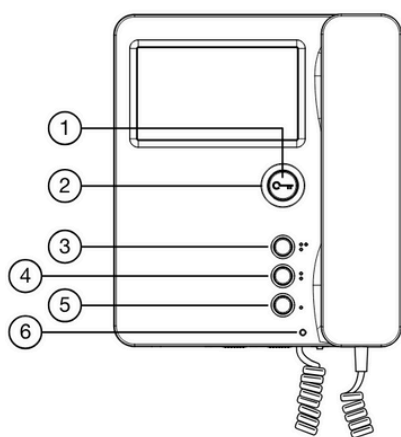

1. Door opener button
2. Green LED located under door opener button
3. programmable button
4. programmable button
5. programmable button
6. Two Coloured LED
7. Terminals for system connection
8. Configuration dip-switch
9. Pre-set for in/out connection with accessory Sch. 1750;50
10. Brightness
11. Colour
12. Screws to fasten video door phone to the supplied metal bracket